




THERA 650



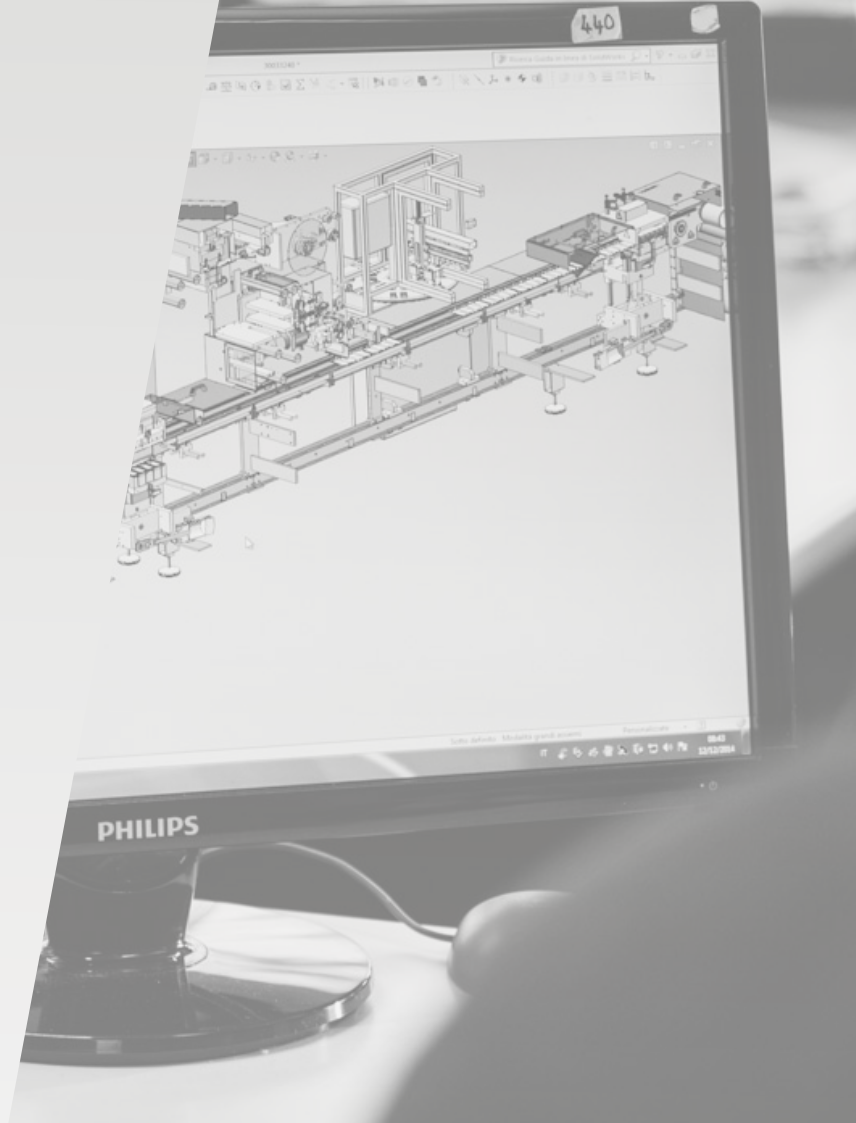

Cutting-edge quality & flexibility,  
matured throughout  
Half a century of experience!

THERA 650  
OUR FLAGSHIP!



**HYGIENE**  
Cantilevered surfaces  
for full wash down!



**RELIABILITY**  
granted by its proven  
high performances!



**EASY**  
access for maintenance  
and service



The **HIGHEST** possible **OUTPUTS**,  
for this machinery range!




**TAILOR MADE:**  
No limits to customization!



**COMPATIBILITY**  
& Handshake with a Wide variety  
of devices & accessories

# MODEL 650 | THERA



USER FRIENDLY  
with Latest  
generation HMI !

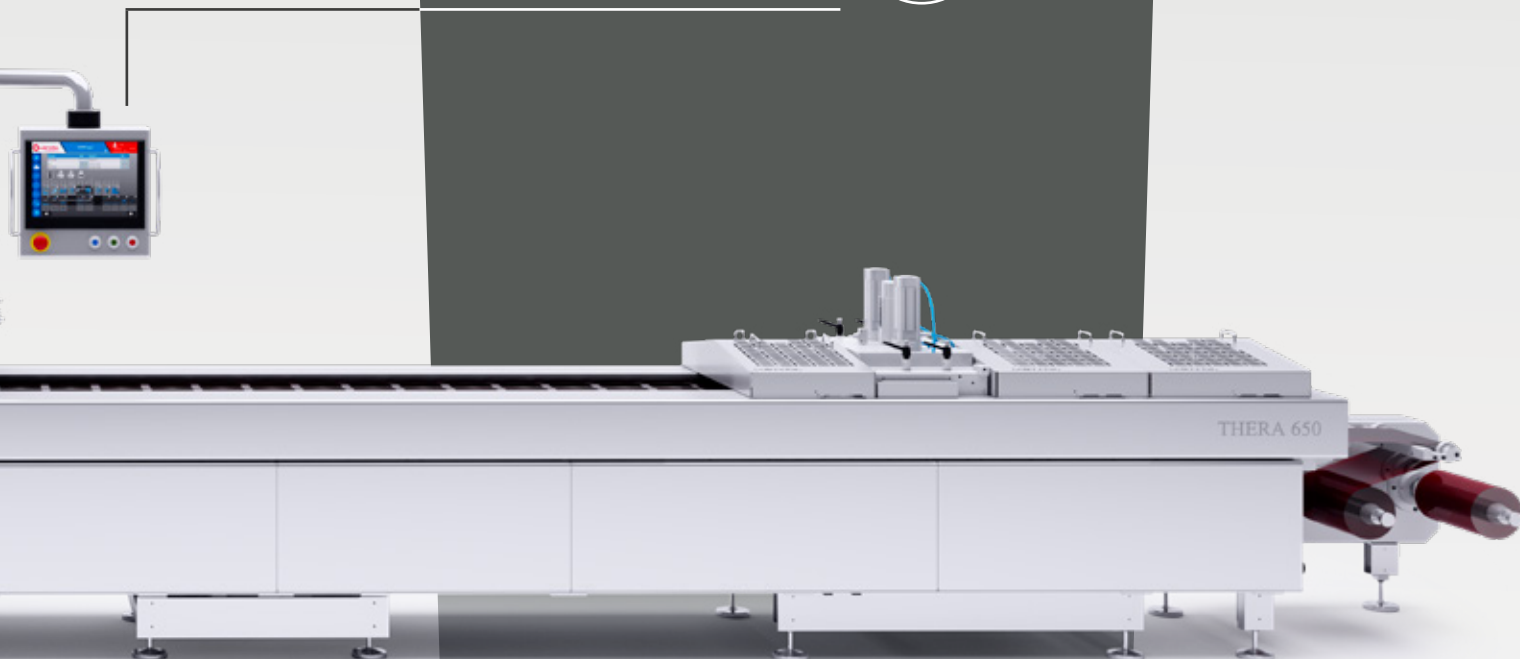

Massive COST SAVINGS  
on labor & packaging materials!

ROCK-SOLID  
Stainless steel frame &  
components!



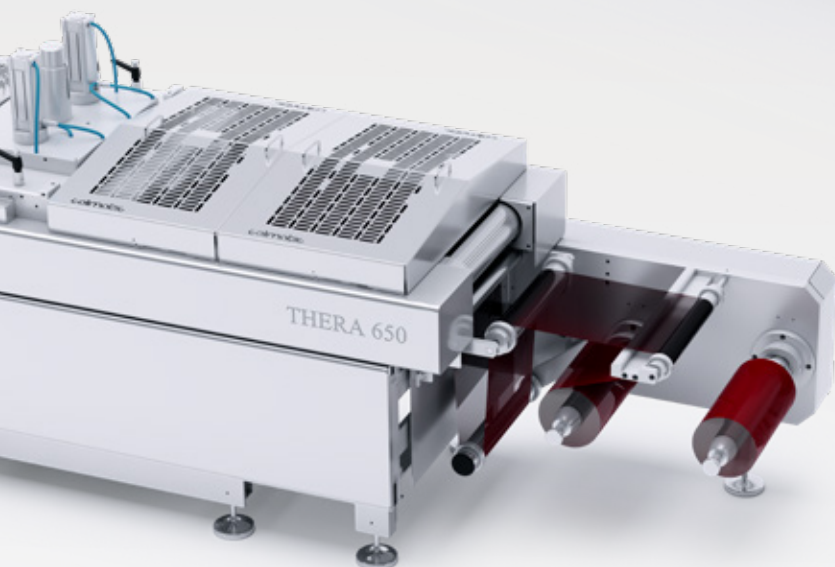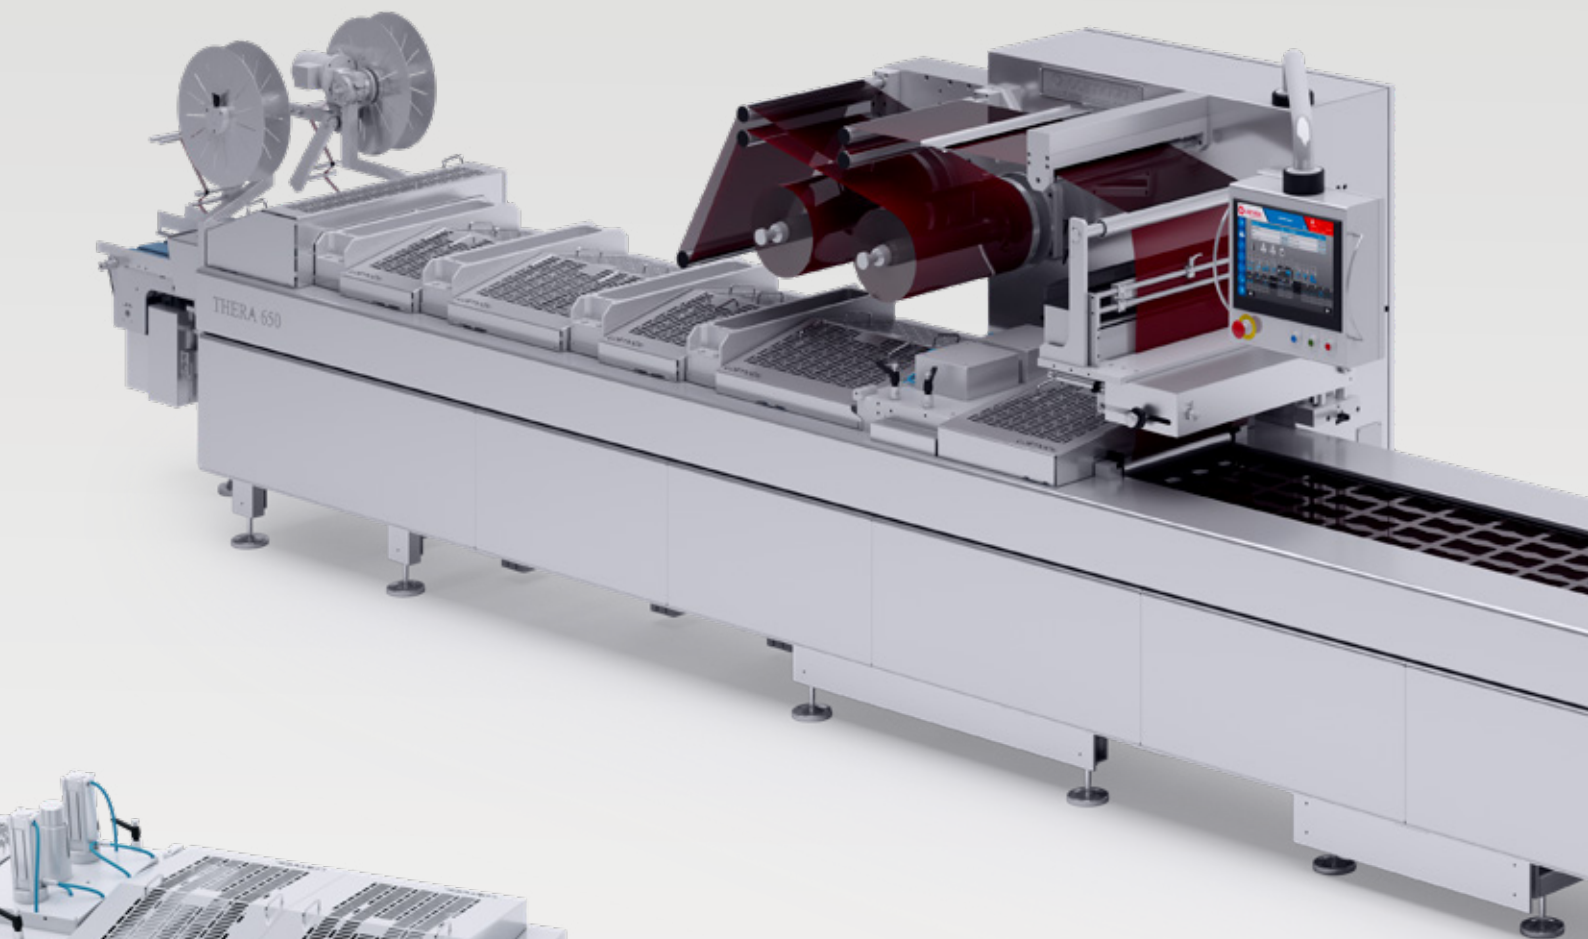

## HYGIENE

Separated & hermetic valve boxes; no sharp edges; sloped surfaces; optional water proof HMI: will grant the highest levels of components **protection & Hygiene!**




## RESISTIVE OPERATOR PANEL

to allow a friendly HMI use, in any working condition!

Additionally: its Trouble shooting & comprehensive alarm visualization, are coupled with our **remote assistance service!**

## LIFTING MECHANISM

with N.4 Sturdy lifting columns, for each chamber, will grant **forming reliability & good seals** in the very long term!

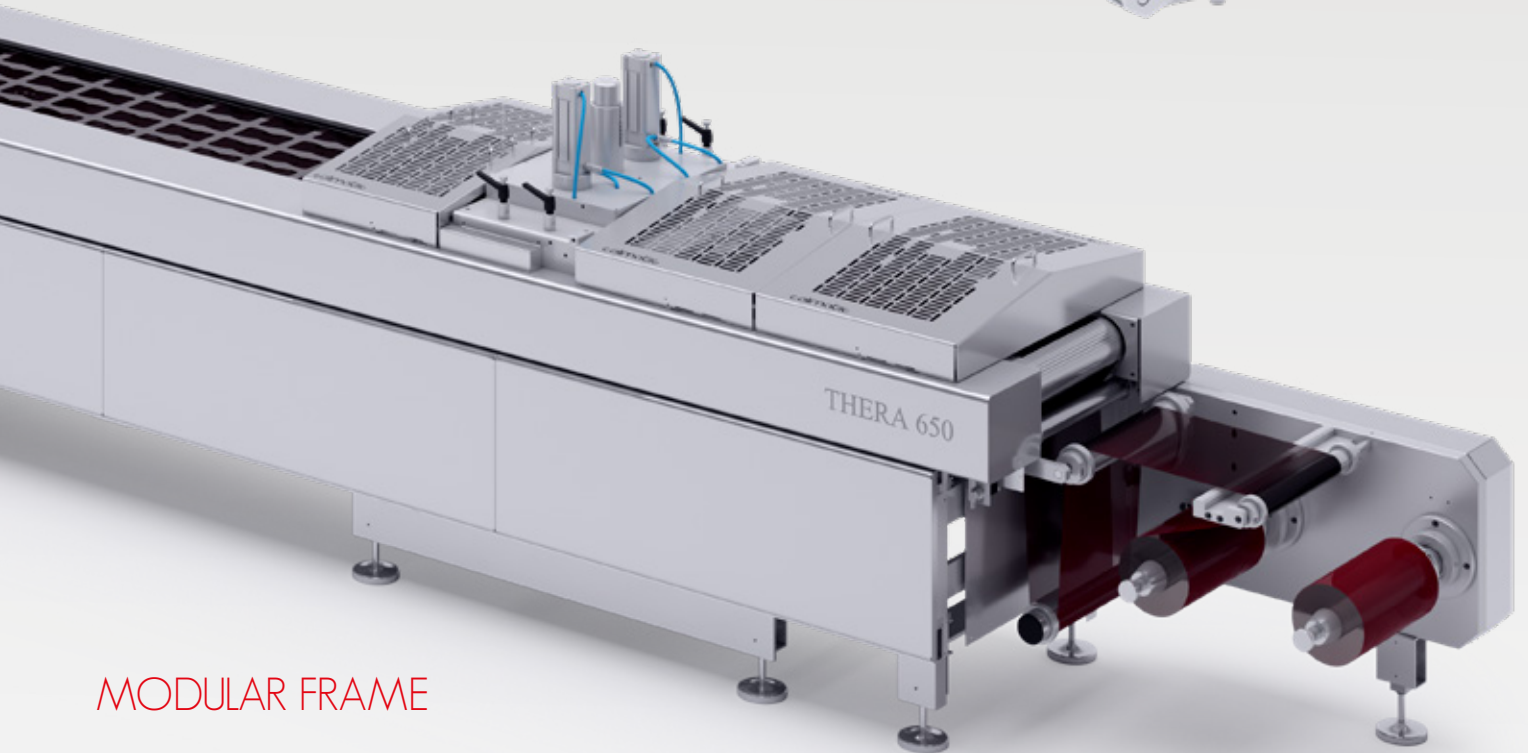


## MODULAR FRAME

...to guarantee the highest possible flexibility, in terms of **production options & customization!**

## HINGED CHAMBERS

with folding opening device  
...to allow the **fastest** format change,  
cleaning & maintenance operations!

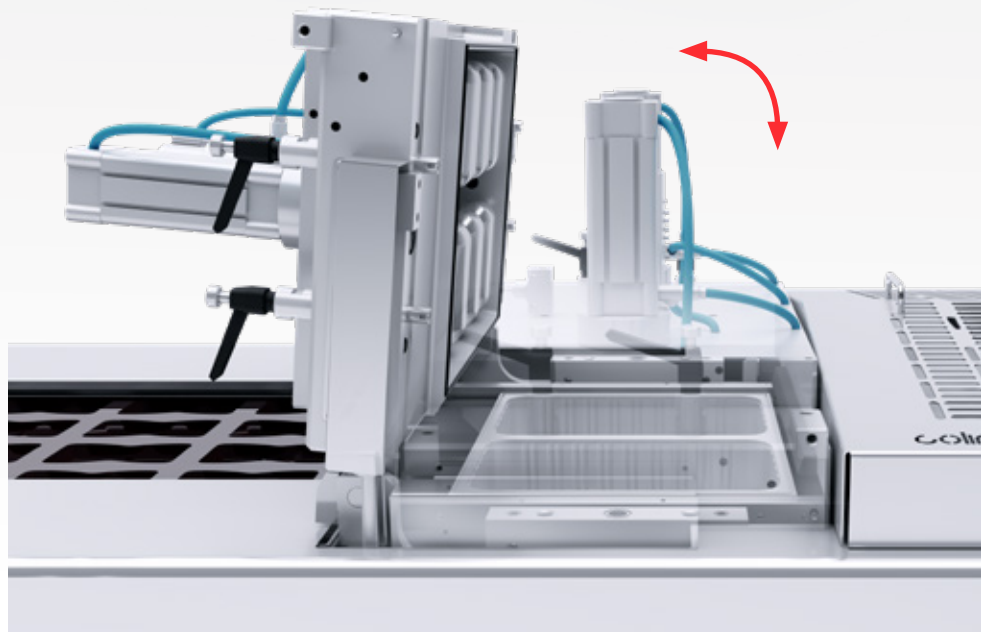

## TECHNOLOGIES


- Sealing
- Vacuum
- Modified atmosphere (MAP)
- Shrink
- Skintpack
- Posiform
- Double chamber automatic die configuration (FV)
- Multiple Index

## COMPONENTS

- Electrical: PLC Siemens
- Pneumatic: FESTO
- Vacuum Pumps: BUSCH
- Control interface: PLC Siemens



## PERFORMANCE

- Production: Up to 35 cycles/min
- Film material: film thickness up to 1200 my
- Top film reel Max diam. 500 mm
- Bottom film reel Max diam. 500 mm

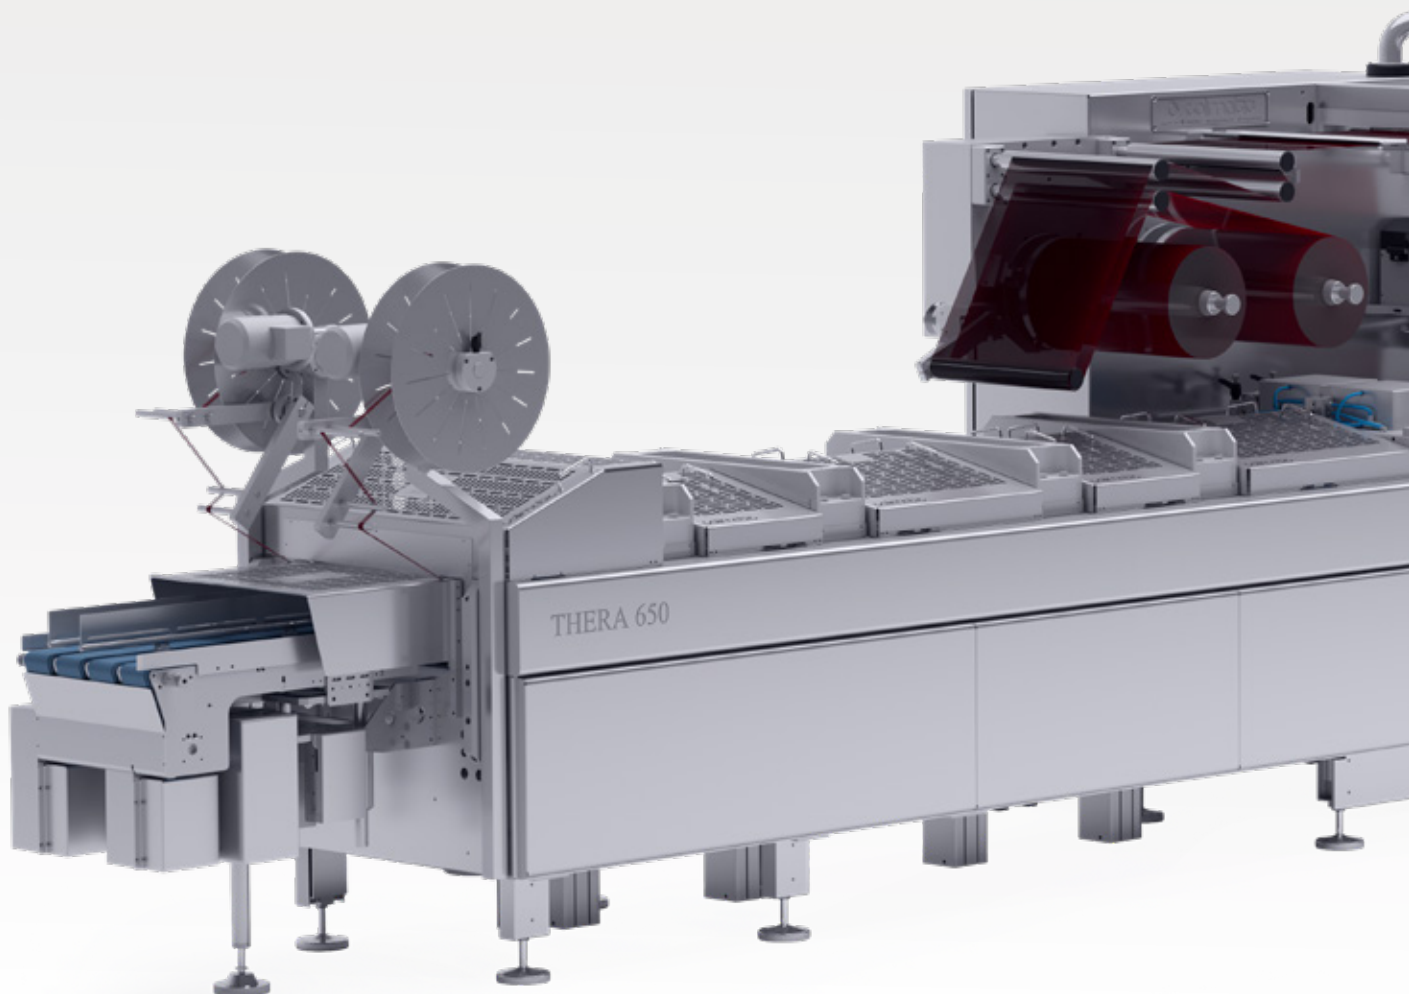


# TECHNICAL FEATURES


- Machine's length: Customized
- Machine's width: up to 1200 mm
- Machine's height: up to 2000 mm
- Loading area: Customized
- Bottom film width: up to 660 mm
- Top film width: Up to 640 mm
- Max advancing index: Up to 1100 mm
- Pack max depth: Up to 220 mm

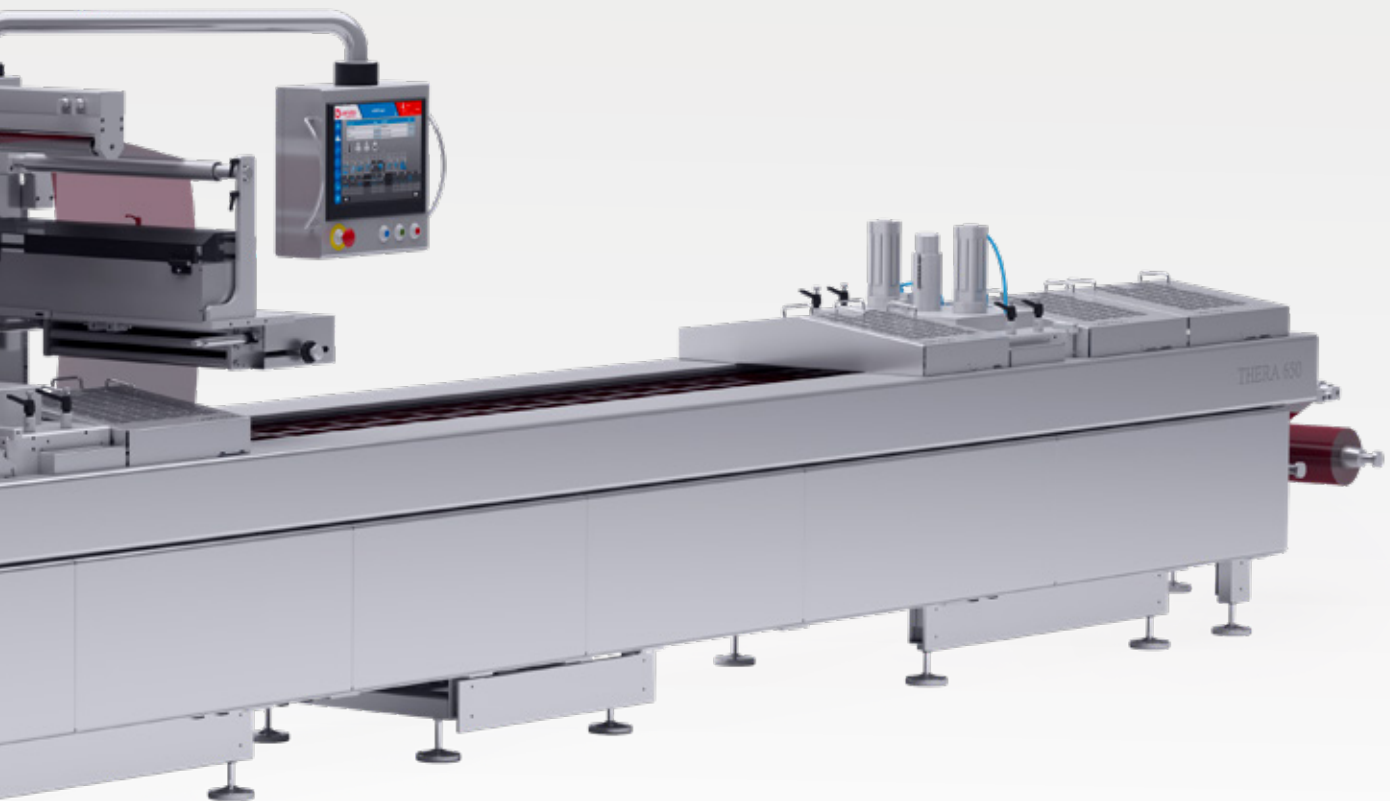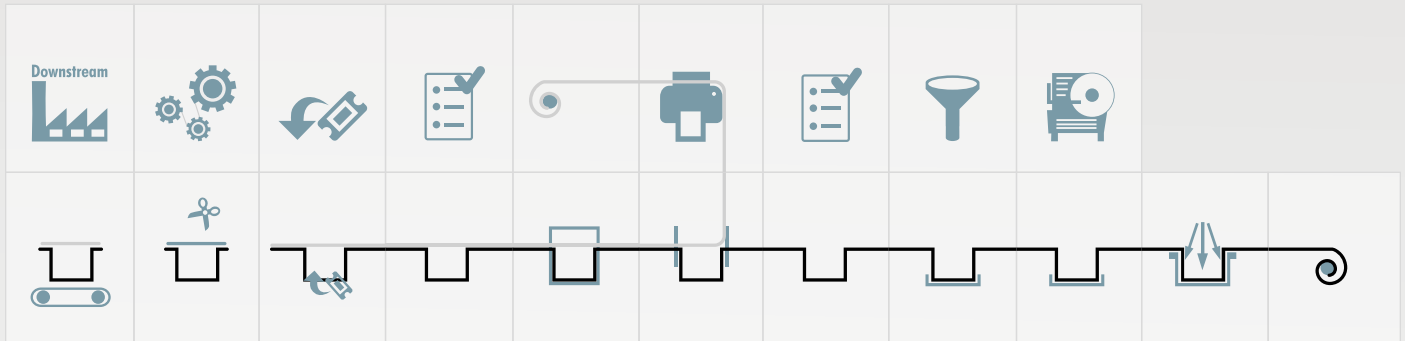

# OPTIONALS

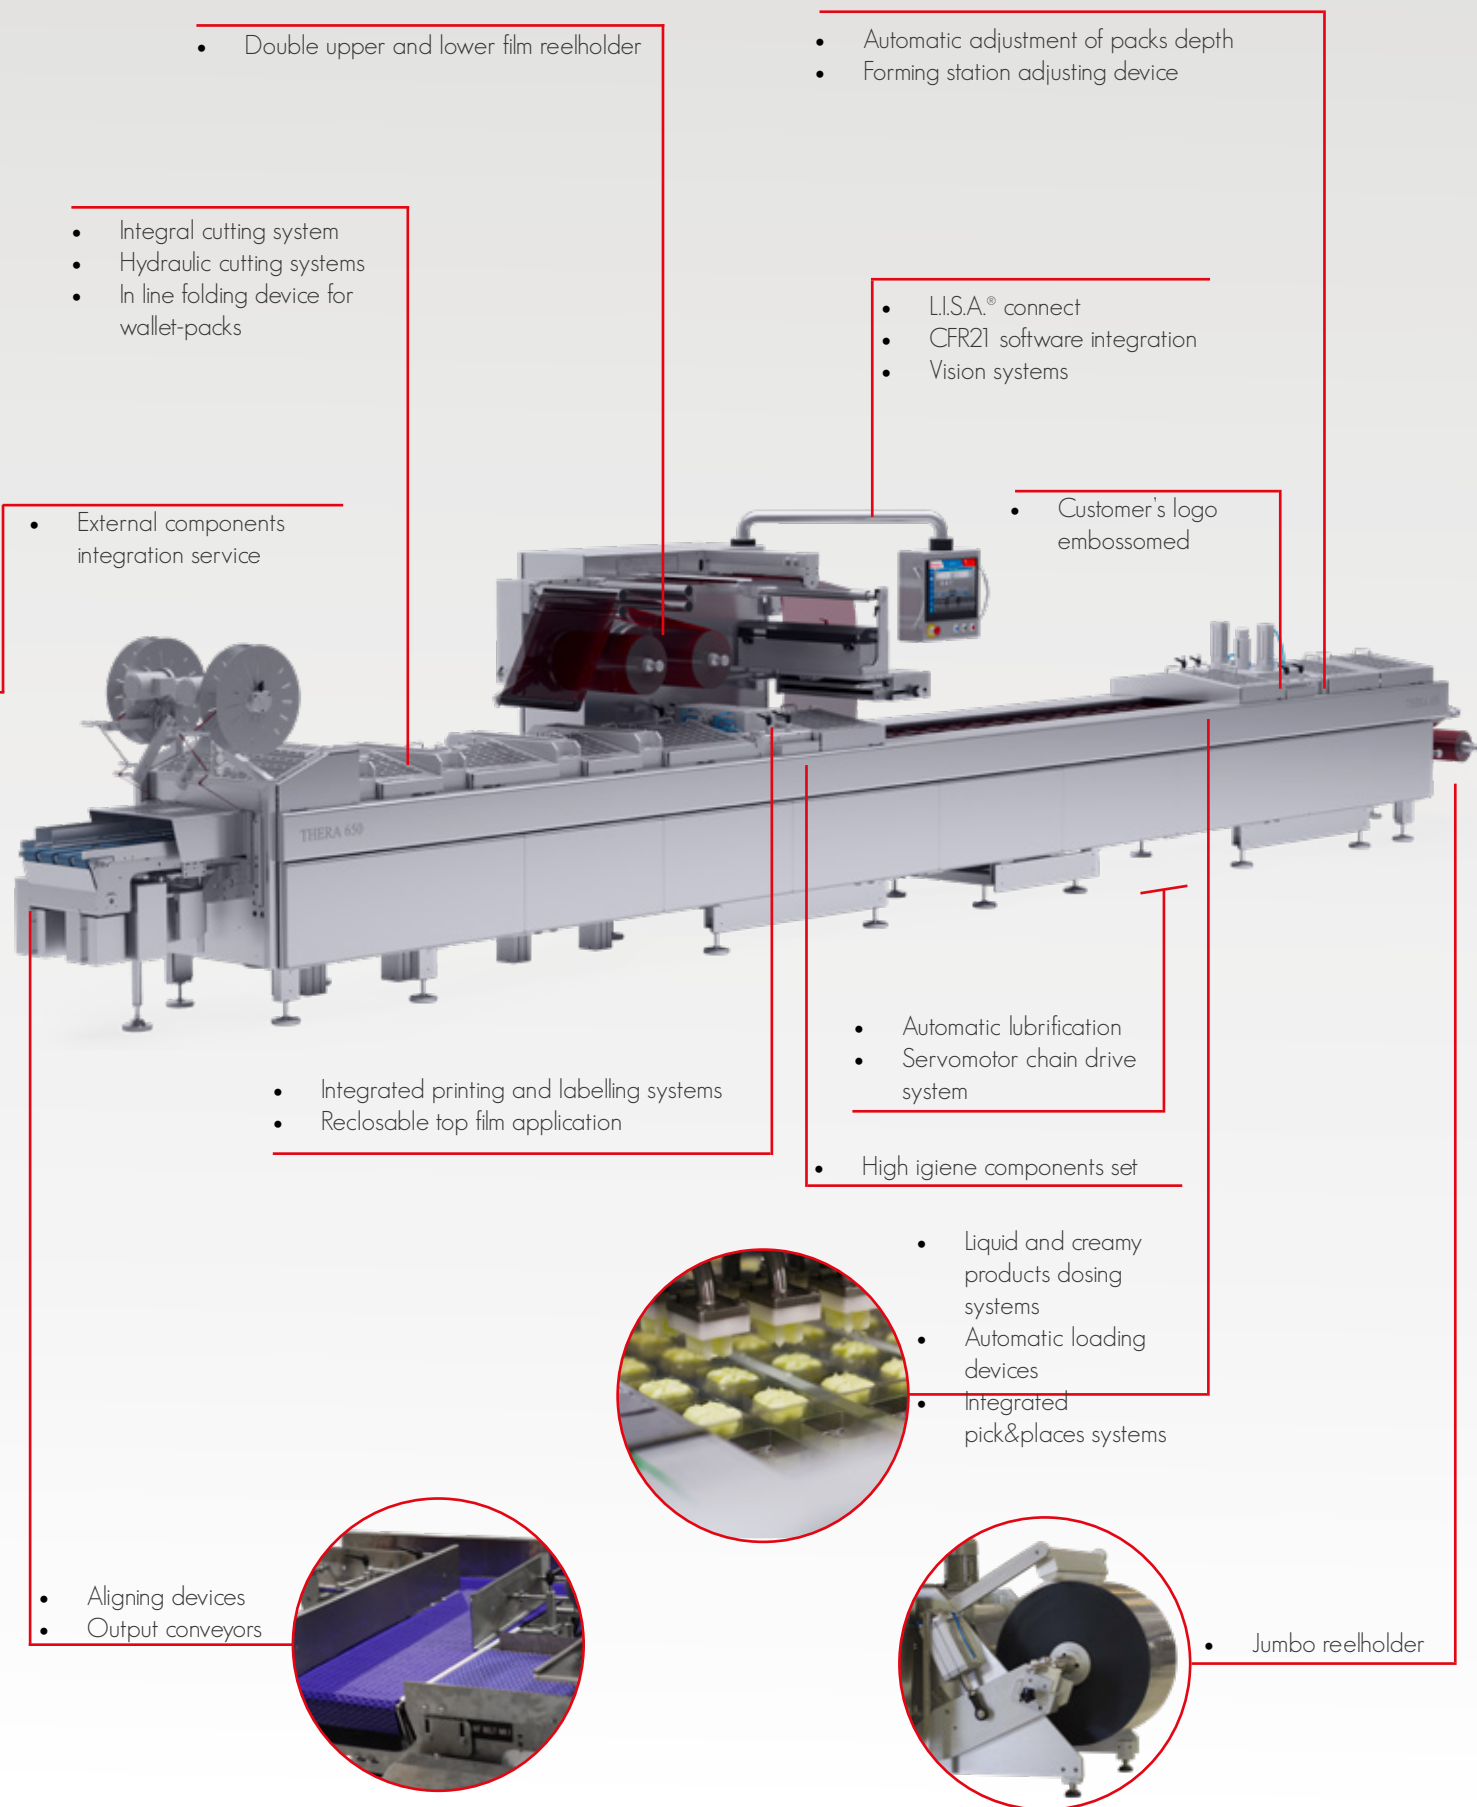

# NOTE

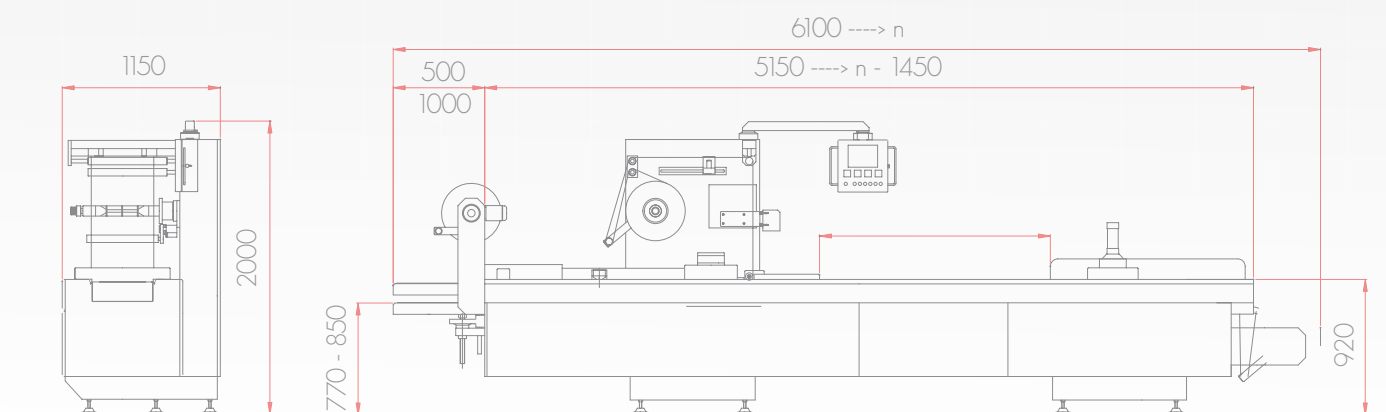

ITALIAN HEART



Made in Italy

GLOBAL SOUL



SMALL  
ENOUGH TO LISTEN  
**BIG** ENOUGH  
TO SERVE!



COLIGROUP S.p.A Via del lavoro A, 9 25032

CHIARI (BS) Italy

Telefono - 39 030 7000761/2/3

Fax - 39 030 713370

Email: [info@colimatic.it](mailto:info@colimatic.it) [www.colimatic.it](http://www.colimatic.it)